



FRONT VIEW

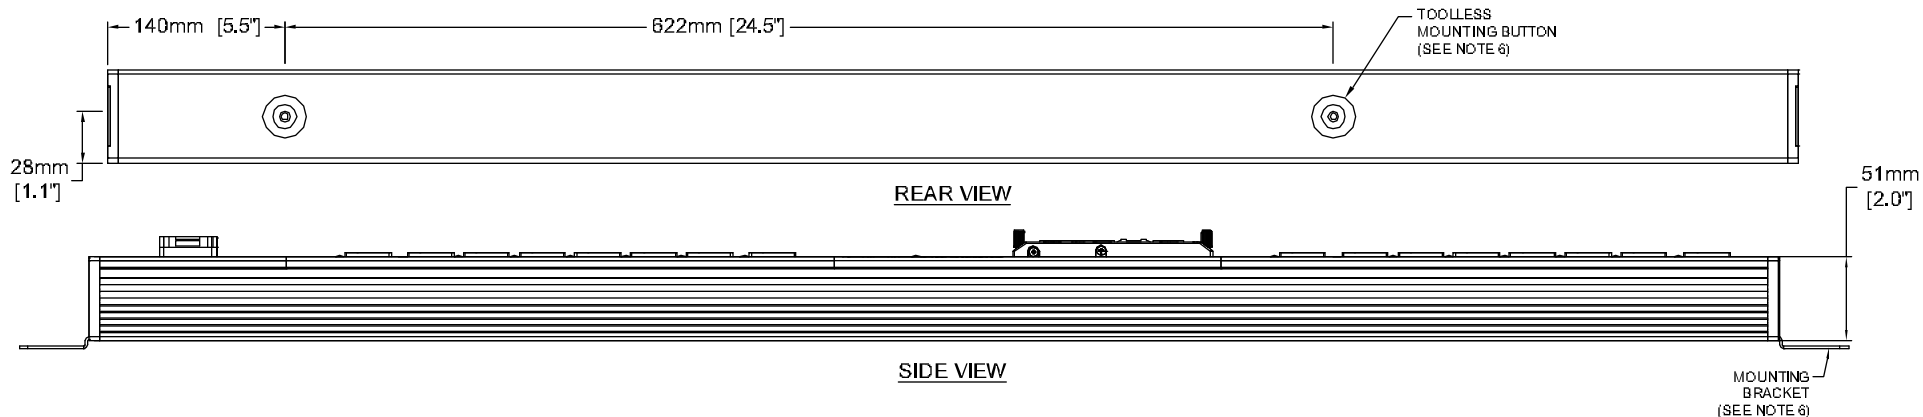

REAR VIEW

SIDE VIEW



IEC-C20  
(2P/3W, 16A, 250 VAC)

**AGENCY COMPLIANCE:**

IEC 60950-1:2005 (SECOND EDITION) + AMENDMENT 1:2009, CSA C22.2 NO. 60950-1-07 (2ND EDITION) + AMENDMENT 1:2009, IECCE CB FULL CERTIFICATION SCHEME (CB-FCS) EN55022:2006 + A1:2007, CLASS A, INDUSTRIAL, EN55024:1998 + A1:2001 + A2:2003, CLASS A, INDUSTRIAL  
ROHS COMPLIANT (REDUCTION OF HAZARDOUS SUBSTANCES)  
WEEE COMPLIANT (WASTE OF ELECTRICAL AND ELECTRONIC EQUIPMENT)

**ENVIRONMENTAL:**

OPERATING: 41° F-140° F (5° C-60° C) NON-CONDENSING, NON-CORROSIVE,  
10% - 90% RH  
STORAGE TEMPERATURE: -4° F-185° F (-20° C -85° C)

**NOTES:**

1. UNIT DIMENSIONS: 1004mm (39.5") H x 64mm (2.5") D x 56mm (2.2") W
2. UNIT WEIGHT: 7.5kg (16.5lbs)
3. SHIPPING DIMENSIONS: 1962mm (72.2") H x 273mm [10.7"] D x 159mm [6.2"] W
4. SHIPPING WEIGHT: 8.4kg (18.5lbs)
5. ALL WIRING IS TO BE IN COMPLIANCE WITH NATIONAL AND LOCAL ELECTRIC CODES.
6. (2) MOUNTING BUTTONS AND (2) MOUNTING BRACKETS SUPPLIED WITH EACH UNIT. EITHER OPTION CAN BE USED TO MOUNT THE PDU.

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1% + 0.1 VAC
CURRENT	±1.5% + 0.01A FROM 1% TO 10% OF UNIT RATING; ±1% FROM >10% TO 125% OF UNIT RATING

**INPUT POWER**

INPUT CONNECTION	WIRE COUNT	PHASE	VOLTAGE (VAC)	RATED AMPS	MAX. CONT. AMPS
IEC-C20*	L + L + PE or L + N + PE	1	100-240V	16	16

\*OPTIONAL INPUT CORD MUST BE ORDERED.

**OUTPUT POWER**

BANK	RECEPTACLE TYPE (QUANTITY)	NOMINAL VOLTAGE (VAC)	MAX. CONTINUOUS AMPS	
			PER RECEPTACLE	PER BANK
A	(16) IEC-C13	100-240V	10	16

DRAWN BY K. STACY	SHEET NO. 1 OF 1
CHK BY S. KALAIPOS	ECN NO.
REF. DWG.	ORDER NO.

MPH2 MANAGED RACK PDU  
OUTLET METERED AND OUTLET SWITCHED  
MPHR3141

DWG. NO. MPHR3141	DATE 11/26/14	REV. # 1	1050 DEARBORN DRIVE P.O. BOX 29 185 COLUMBUS, OHIO 43229
----------------------	------------------	-------------	--

