




FRONT VIEW

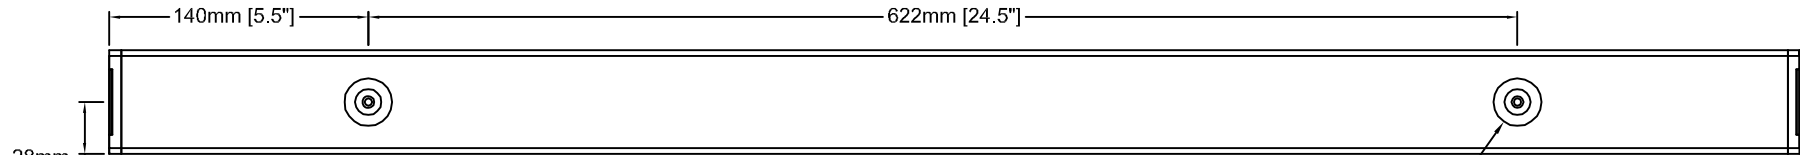

REAR VIEW

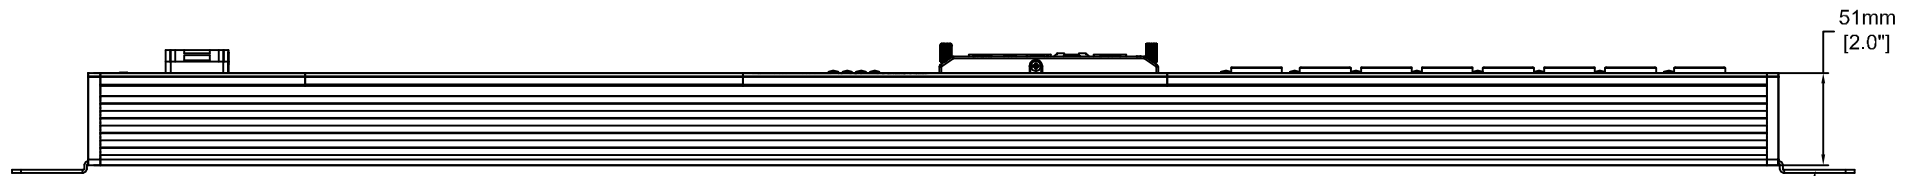

SIDE VIEW



IEC-C20
(2P/3W, 16A, 250 VAC)

AGENCY COMPLIANCE:

IEC 60950-1:2005 (SECOND EDITION) + AMENDMENT 1:2009, CSA C22.2 NO. 60950-1-07 (2ND EDITION) + AMENDMENT 1:2009, IECCE CB FULL CERTIFICATION SCHEME (CB-FCS) EN55022:2006 + A1: 2007, CLASS A, INDUSTRIAL, EN55024:1998 + A1:2001 + A2:2003, CLASS A, INDUSTRIAL
ROHS COMPLIANT (REDUCTION OF HAZARDOUS SUBSTANCES)
WEEE COMPLIANT (WASTE OF ELECTRICAL AND ELECTRONIC EQUIPMENT)

ENVIRONMENTAL:

OPERATING: 41° F - 140° F (5° C - 60° C) NON-CONDENSING, NON-CORROSIVE, 10% - 90% RH
STORAGE TEMPERATURE: -4° F - 185° F (-20° C - 85° C)

NOTES:

- UNIT DIMENSIONS: 917mm (36.1") H x 64mm (2.5") D x 56mm (2.0") W
- UNIT WEIGHT: 7.5kg (16.5lbs)
- SHIPPING DIMENSIONS: 1962mm (72.2") H x 273mm [10.7"] D x 159mm [6.2"] W
- SHIPPING WEIGHT: 8.4kg (18.5lbs)
- ALL WIRING IS TO BE IN COMPLIANCE WITH NATIONAL AND LOCAL ELECTRIC CODES.
- (2) MOUNTING BUTTONS AND (2) MOUNTING BRACKETS SUPPLIED WITH EACH UNIT. EITHER OPTION CAN BE USED TO MOUNT THE PDU.

INPUT POWER

INPUT CONNECTION	WIRE COUNT	PHASE	VOLTAGE (VAC)	RATED AMPS	MAX. CONT. AMPS
IEC-C20*	L + L + PE or L + N + PE	1	100-250V	20	16

*OPTIONAL INPUT CORD MUST BE ORDERED.

OUTPUT POWER

BANK	RECEPTACLE TYPE (QUANTITY)	NOMINAL VOLTAGE (VAC)	MAX. CONTINUOUS AMPS	
			PER RECEPTACLE	PER BANK
A	(8) IEC-C13	100-250V	12	16

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1% + 0.1 VAC
CURRENT	±1.5% + 0.01A FROM 1% TO 10% OF UNIT RATING; ±1% FROM >10% TO 125% OF UNIT RATING

DRAWN BY K. STACY	SHEET NO. 1 OF 1
CHK BY S. KALAIPOS	ECN NO.
REF. DWG.	ORDER NO.

MPH2 MANAGED RACK PDU
OUTLET METERED
MPHM3341

DWG. NO. MPHM3341	DATE 10/14/14	REV. # 1	1050 DEARBORN DRIVE P.O. BOX 29186 COLUMBUS, OHIO 43229
----------------------	------------------	-------------	---

